

# TECHNICAL DATASHEET

## Self Adhesive Plasterers Scrim

### Description & Uses


An extra high tack scrim tape for reinforcing plasterboard joints, creating a smooth finish and reducing the risk of cracking and bubbling on plaster joints. **Made in Europe.**

### Storage

Store in cool, dry conditions, away from direct sunlight. Ideally store between -10°C & +50°C.

### Shelf Life

12 months when stored in original, unopened packaging.

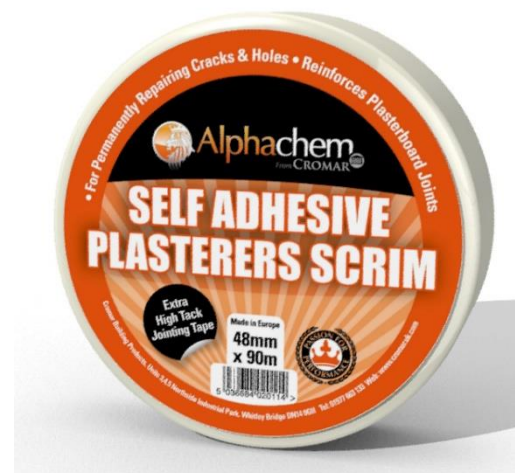

### Technical Data

<b>Setting of the fibreglass yarns (informative value)</b>	Warp	Weft
	35.4 ends / 10cm 9 ends / in	35.4 ends / 10cm 9 ends / in
<b>Treated fabric weight (incl. glue) (informative value)</b>	64,5 ± 3,5 g / m <sup>2</sup> 1,90 ± 0,10 oz / yd <sup>2</sup>	
<b>DPU (PES + coating + PSA) (informative value)</b>	41 – 47 %	
<b>Thickness (informative value)</b>	0,26 mm 0,01 inch	
<b>Tensile strength</b>	Warp	Weft
	260 N / 2,54 cm 57 lbs / in	483 N / 2,54 cm 106 lbs / in

### Limitations

Ensure substrate is completely clean before application.

It is the user's responsibility to ensure suitability for use. Technical Data and Safety Data available on request.

### Further Information:

In the event of further queries or problems concerning the use of this product, please contact the address below, e-mail [info@cromar.uk.com](mailto:info@cromar.uk.com).

*All products should be sold in accordance with the manufacturer's instructions. The manufacturer cannot be held responsible where conditions of use are beyond our control. Cromar Building Products Limited products' are available for sale in accordance with Cromar Building Products Limited standard conditions of sale, which is available upon request. Whilst any information contained herein is to the best of our knowledge true and accurate, no warranty is given or implied in connection with any recommendations, agents, or distributors, as the conditions of use and any labour involved are beyond our control. Our warranty is therefore limited to the quality of supplied product.*