

TECHNICAL DATASHEET

Water Seal Solvent Free

Description & Uses

Water Seal SF provides long lasting effective protection of substrates such as brick, stone, concrete and rendering. This solvent free product provides water repellency with non-staining and stain blocking features.

Directions

- All surfaces must be dry and sound and free from any oil, grease, treatment debris and algae.
- Shake well before use, ready to use product, no need to dilute.
- New concrete must be left 4 - 6 weeks prior to treatment.
- Do not apply if rain is likely within 3-4 hours of application.
- Can be applied by brush, roller or airless sprayer.
- Apply to a small test area before full scale application, if in doubt, and leave for 24 hours.
- Apply one or two coats dependent on desired effect.
- Allow 2-3 hours between coats.
- Clean equipment with special thinners after use.

Storage


Store in a cool dry place between 5 to 25°C, protect from frost. High temperatures can effect the quality of the product.

Shelf Life

6 months when stored as directed

Limitations

- As the manufacturer cannot know all the uses its products may be put to, it is the user's responsibility to determine suitability of use.
- Read the label prior to use for health and safety information, Safety data Sheet available on request.

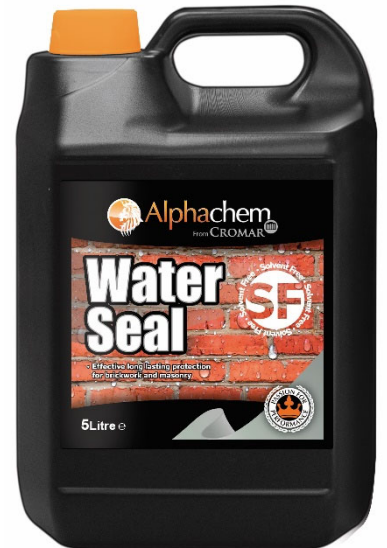

Technical Data

Solids Content	10 ± 1%
Viscosity	>500 cps Brookfield 2/50
pH	8
Odour	Slight

Further Information:

In the event of further queries or problems concerning the use of this product, please contact the address below, e-mail info@cromar.uk.com.

All products should be sold in accordance with the manufacturer's instructions. The manufacturer cannot be held responsible where conditions of use are beyond our control. Cromar Building Products Limited products' are available for sale in accordance with Cromar Building Products Limited standard conditions of sale, which is available upon request. Whilst any information contained herein is to the best of our knowledge true and accurate, no warranty is given or implied in connection with any recommendations, agents, or distributors, as the conditions of use and any labour involved are beyond our control. Our warranty is therefore limited to the quality of supplied product.