

TECHNICAL DATASHEET

All Trades PVCu Activator

Description & Uses

PVCu Activator is an activator which when used together with AlphaChem high viscosity superglue creates a rapid (10 seconds), high strength bond.

Ideal for PVC, PVCu and plastics applications as it will not yellow. Can be used on rough and vertical surfaces.

Our product does not contain harmful compounds such as Chlorofluorocarbons or Methylene Chloride.

Directions

- Ensure all surfaces are clean, sound, dry and free from dust, grease or other contaminants.
- Substrates need to be smooth and have a perfect connection area.
- Spray the activator over one of the surfaces. Apply a drop of the superglue to the other surface. Join substrates together immediately and press firmly for a few seconds.
- Application temperature should be between +5°C and +35°C.

Storage


Store in cool, dry conditions, away from direct sunlight. Ideally store between +5°C & +25°C. Ensure container is closed properly.

Shelf Life

24 months when stored in original, unopened packaging.

Limitations

- Avoid exposure to strong light and heat sources.
- Do not drip into skin or eyes – can cause serious injury to eyes.
- Flammable – keep away from sources of ignition.
- Activator box is pressurised, do not crush or drill.
- It is the user's responsibility to ensure suitability for use.
- Please read the label prior to use as it contains essential health and safety information. Safety Data Sheet is available on request which contains further information, it is advisable to read the SDS prior to using.

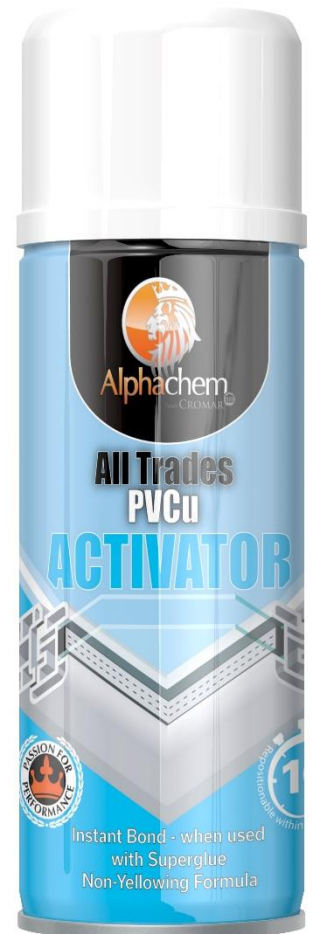

Technical Data

Basis	Hexane
Appearance	Aerosol
Colour	Colourless
Application Temperature	+5 to +35°C
Temperature Resistance	-20 to +70°C
Flashpoint	>81°C

Further Information:

In the event of further queries or problems concerning the use of this product, please contact the address below, e-mail info@cromar.uk.com.

All products should be sold in accordance with the manufacturer's instructions. The manufacturer cannot be held responsible where conditions of use are beyond our control. Cromar Building Products Limited products' are available for sale in accordance with Cromar Building Products Limited standard conditions of sale, which is available upon request. Whilst any information contained herein is to the best of our knowledge true and accurate, no warranty is given or implied in connection with any recommendations, agents, or distributors, as the conditions of use and any labour involved are beyond our control. Our warranty is therefore limited to the quality of supplied product.